


Skyhook Anchor

Part #	Description
00300	Skyhook Anchor. Compatible roof pitch: flat.
00310	Skyhook Anchor. Compatible roof pitch: 1/12 - 3/12.
00320	Skyhook Anchor. Compatible roof pitch: 4/12 - 6/12.
00330	Skyhook Anchor. Compatible roof pitch: 7/12 - 9/12.
00340	Skyhook Anchor. Compatible roof pitch: 10/12 - 12/12.
00342	Skyhook Anchor w/Swivel Top. Compatible roof pitch: flat - 12/12.

Compliant with all OSHA 1910, OSHA 1926 Subpart M, ANSI Z359.1-2007, and ANSI A10.32-2012 regulations.

Custom configurations not available. Not repairable. Contact customer service for details.

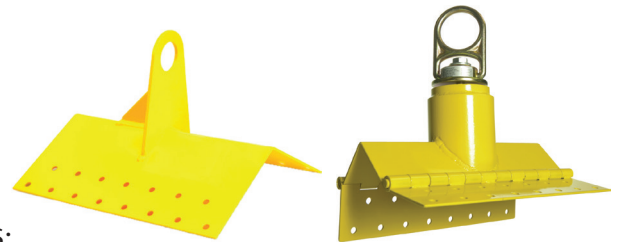

Skyhook Anchor is suitable for the following applications:



Personal Fall Arrest: Skyhook Anchors may be used in Personal Fall Arrest applications to support a MAXIMUM 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. Maximum free fall is 6' unless used in combination with equipment explicitly certified for extended free fall. Applicable D-ring: Dorsal.



Restraint: Skyhook Anchors may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, Shoulder.



Work Positioning: Skyhook Anchors may be used in Work Positioning applications. Work Positioning systems allow a worker to be supported while in suspension and work freely with both hands. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. Maximum allowable free fall is 2'. Applicable D-rings: Side, Shoulder.

For all applications: worker weight capacity range (including all clothing, tools, and equipment) is 130-310 lbs., or up to 420 lbs. if used in combination with equipment explicitly certified for such use.

Materials: powder-coated steel and zinc-plated steel.

MAXIMUM 1 connection per Skyhook Anchor.

MINIMUM substrate requirements:

Wood: 3/4" CDX. Metal: 20 gauge. Concrete: 2,000 psi.

May be installed a MAXIMUM 16' apart. Must be installed MINIMUM 10' from leading edge.

Suitable for use in a complete and compatible HLL system.

UPC-A Codes: 00300: 672421003009; 00310: 672421003108; 00320: 672421003207; 00330: 672421003306; 00340: 672421003405; 00342: 672421003429