

GUARDIAN

FALL PROTECTION



Product Name: Yellow Jacket SRL

Part #: 10946; 10950; 10952; 10957; 10958

Instruction Manual

**Do not throw away these instructions!
Read and understand these instructions before using equipment!**

Table of Contents

Introduction	1-2
Applicable Safety Standards	2
Worker Classifications	2
Safety Information	3-4
Maintenance, Cleaning, and Storage	5
Inspection	5
Product Specific Applications	6
Limitations	7-9
Components and Specifications	10
Installation and Use	11-12
Labels	13
Inspection Log	14
Notes	14

Introduction

Thank you for purchasing a Guardian Fall Protection Yellow Jacket SRL. This manual must be read and understood in its entirety, and used as part of an employee training program as required by OSHA or any applicable state agency.

This and any other included instructions must be made available to the user of the equipment. The user must understand how to safely and effectively use the Yellow Jacket SRL, and all fall safety equipment used in combination with the Yellow Jacket SRL.

User Information	
Date of First Use:	_____
Serial #:	_____
Trainer:	_____
User:	_____

Applicable Safety Standards

When used according to instruction specifications, this product meets or exceeds all applicable OSHA 1926 Subpart M, OSHA 1910, ANSI Z359.14-2012, and ANSI A10.32-2012 standards for fall protection. Applicable standards and regulations depend on the type of work being done, and also might include state-specific regulations. Consult regulatory agencies for more information on personal fall arrest systems and associated components.

Worker Classifications



Understand the following definitions of those who work near or who may be exposed to fall hazards.

Qualified Person: A person with an accredited degree or certification, and with extensive experience or sufficient professional standing, who is considered proficient in planning and reviewing the conformity of fall protection and rescue systems.

Competent Person: A highly trained and experienced person who is ASSIGNED BY THE EMPLOYER to be responsible for all elements of a fall safety program, including, but not limited to, its regulation, management, and application. A person who is proficient in identifying existing and predictable fall hazards, and who has the authority to stop work in order to eliminate hazards.

Authorized Person: A person who is assigned by their employer to work around or be subject to potential or existing fall hazards.

It is the responsibility of a Qualified or Competent person to supervise the job site and ensure all applicable safety regulations are complied with.

Safety Information



Failure to understand and comply with safety regulations may result in serious injury or death. Regulations included herein are not all-inclusive, are for reference only, and are not intended to replace a Competent Person's judgment or knowledge of federal or state standards.

Do not alter equipment.

Do not misuse equipment.

Workplace conditions, including, but not limited to, flame, corrosive chemicals, electrical shock, sharp objects, machinery, abrasive substances, weather conditions, and uneven surfaces, must be assessed by a Competent Person before fall protection equipment is selected.

The analysis of the workplace must anticipate where workers will be performing their duties, the routes they will take to reach their work, and the potential and existing fall hazards they may be exposed to.

Fall protection equipment must be chosen by a Competent Person. Selections must account for all potential hazardous workplace conditions.

All fall protection equipment should be purchased new and in an unused condition.

Fall protection systems must be selected and installed under the supervision of a Competent Person, and used in a compliant manner.

Fall protection systems must be designed in a manner compliant with all federal, state, and safety regulations.

Unless explicitly stated otherwise, the maximum allowable free fall distance for lanyards must not exceed 6'. No free fall allowed for non-LE SRLs. SRLs must arrest falls within 54".

Forces applied to anchors must be calculated by a Competent Person.

Harnesses and connectors selected must be compliant with manufacturer's instructions, and must be of compatible size and configuration.

A pre-planned rescue procedure in the case of a fall is required. The rescue plan must be project-specific. The rescue plan must allow for employees to rescue themselves, or provide an alternative means for their prompt rescue.

Store rescue equipment in an easily accessible and clearly marked area.

Training of Authorized Persons to correctly erect, disassemble, inspect, maintain, store, and use equipment must be provided by a Competent Person.

Training must include the ability to recognize fall hazards, minimize the likelihood of fall hazards, and the correct use of personal fall arrest systems.

NEVER use fall protection equipment of any kind to hang, lift, support, or hoist tools or equipment, unless explicitly certified for such use.

Maintenance of equipment must be done according to manufacturer's instructions. Equipment instructions must be retained for reference.

Prior to EACH use, all equipment in a fall protection system must be inspected for any potential or existing deficiencies that may result in its failure or reduced functionality. IMMEDIATELY remove equipment from service if any deficiencies are found.

Equipment must be inspected by a Competent Person at least every six months. These inspections must be documented in equipment instruction manual and on equipment inspection grid label.

Equipment must be inspected for defects, including, but not limited to, the absence of required labels or markings, improper form/fit/function, evidence of cracks, sharp edges, deformation, corrosion, excessive heating, alteration, excessive wear, fraying, knotting, abrasion, and absence of parts.

Equipment that fails inspection in any way must immediately be removed from use, or repaired by an entity approved by the manufacturer.

No on-site repair of equipment unless explicitly permitted by Guardian Fall Protection.

Equipment subjected to forces of fall arrest must immediately be removed from use.

Snap hooks, carabiners, and other connectors must be selected and applied in a compatible fashion. All risk of disengagement must be eliminated. All snap hooks and carabiners must be self-locking and self-closing, and must never be connected to each other.

Age, fitness, and health conditions can seriously affect the worker should a fall occur. Consult a doctor if there is any reason to doubt a user's ability to withstand and safely absorb fall arrest forces or perform set-up of equipment.

Pregnant women and minors must not use this equipment.

Physical harm may still occur even if fall safety equipment functions correctly. Sustained post-fall suspension may result in serious injury or death. Use trauma relief straps to reduce the effects of suspension trauma.

Allowable individual worker weight limit (including all equipment), unless explicitly stated otherwise, is 130-310 lbs.

Maintenance, Cleaning, and Storage

Repairs to Yellow Jacket SRLs can only be made by a Guardian Fall Protection representative or an entity authorized by Guardian. Contact Guardian for all maintenance and repair needs at: 1-800-466-6385. If a Yellow Jacket SRL fails inspection in any way, immediately remove it from service, and contact Guardian to inquire about its return or repair.

Cleaning after use is important for maintaining the safety and longevity of Yellow Jacket SRLs. Remove all dirt, corrosives, and contaminants from Yellow Jacket SRLs before and after each use. If a Yellow Jacket SRL cannot be cleaned with plain water, use mild soap and water, then rinse and wipe dry. NEVER clean Yellow Jacket SRLs with corrosive substances.

When not in use, store equipment where it will not be affected by heat, light, excessive moisture, chemicals, or other degrading elements.

Inspection

KEEP INSTRUCTIONS AVAILABLE FOR REFERENCE. Record date of First Use.

Prior to EACH use, inspect SRLs for deficiencies, including, but not limited to, corrosion, deformation, pits, burrs, rough surfaces, sharp edges, cracking, rust, paint buildup, excessive heating, alteration, fraying, bird-caging, and missing or illegible labels. Inspect full length of lifeline. IMMEDIATELY remove SRL from service if defects or damage are found.

Prior to EACH use, check lifeline retraction by pulling out a minimum 4' and allowing it to retract under light tension; lifeline must retract completely. Pull lifeline sharply to test braking function; brakes must engage. Check shock pack for signs of deployment and/or fall arrest indicator for signs of activation. Fall arrest indicator will display red if activated. IMMEDIATELY remove from service if SRL does not function properly, or if there exists any evidence of exposure to forces of fall arrest.

Ensure that applicable work area is free of all damage, including, but not limited to, debris, rot, rust, decay, cracking, and hazardous materials. Ensure that selected work area will support the application-specific minimum loads set forth in this instruction manual. Work area MUST be stable.

Competent Person other than the user must inspect SRLs AT LEAST every 6 months. Competent Person inspections MUST be recorded in inspection log in instruction manual and on equipment inspection grid label. The Competent Person must sign their initials in the box corresponding to the month and year the inspection took place.

During inspection, consider all applications and hazards SRLs have been subjected to.

Product Specific Applications



WARNING Use of equipment in unintended applications may result in serious injury or death. Maximum 1 attachment per connection point.



Personal Fall Arrest: Yellow Jacket SRLs may be used in Personal Fall Arrest applications as a component of a MAXIMUM 1 Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. Applicable D-ring: Dorsal.

- Standard applications: No free fall is permitted. SRL must always be positioned at or above harness dorsal D-ring AND at or below anchor point.
- Leading Edge (LE) applications: Shock absorber required. Maximum 2' free fall. SRL may be positioned a maximum 2' below harness dorsal D-ring.

If intending to use Yellow Jacket SRL in LE applications, refer to additional LE SRL use instructions (pg. 12).




Restraint: Yellow Jacket SRLs may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, Shoulder.

For all applications: worker weight capacity range (including all clothing, tools, and equipment) is 130-420 lbs.



Limitations

Fall Clearance: There must be sufficient clearance below the anchorage connector to arrest a fall before the user strikes the ground or an obstruction. When calculating fall clearance, account for a MINIMUM 3' safety factor, deceleration distance, user height, length of lanyard/SRL, and all other applicable factors. **Diagram shown is an example fall clearance calculation ONLY.**

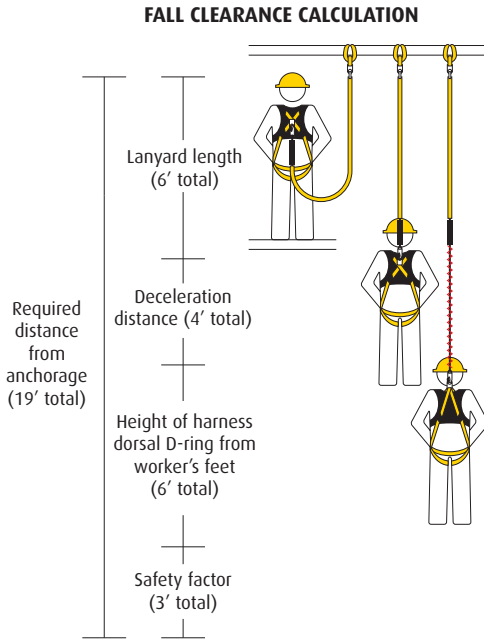

Swing Falls: Prior to installation or use, make considerations for eliminating or minimizing all swing fall hazards. Swing falls occur when the anchor is not directly above the location where a fall occurs. Always work as close to in line with the anchor point as possible. Swing falls significantly increase the likelihood of serious injury or death in the event of a fall.

Compatibility: When making connections with Yellow Jacket SRLs, eliminate all possibility of roll-out. Roll-out occurs when interference between a hook and the attachment point causes the hook gate to unintentionally open and release. All connections must be selected and deemed compatible with Yellow Jacket SRLs by a Competent Person. All connector gates must be self-closing and self-locking, and withstand minimum loads of 3,600 lbs. See the following for examples of compatible/incompatible connections:

Connector closed and locked to D-ring. **OK.**



Connector to integral lanyard. **NO.**

Two or more snap hooks or carabiners connected to each other. **NO.**




Connector directly to webbing. **NO.**

Two connectors to same D-ring. **NO.**



Application that places load on gate. **NO.**

Incompatible or irregular application, which may increase risk of roll-out. **NO.**




Connector directly to horizontal lifeline. **NO.**

Correct Anchorage Positioning:

This chart details allowable working zones required to reduce risk of swing falls and improper side loading. ALWAYS adhere to information specified by chart.

Anchor Distance From Leading Edge (Y)	Working Distance Along Roof Edge (Either Direction) (X)	Working Angle From Perpendicular (θ)
6'	8'	53°
10'	9' - 9"	45°
15'	11' - 7"	38°
20'	13' - 3"	33°
25'	14' - 6"	30°
30'	16'	28°
35'	17' - 2"	26°
40'	18' - 3"	24°
45'	19' - 4"	23°
50'	19' - 10"	21°
55'	21' - 4"	21°
60'	22' - 3"	21°

For example, if the anchorage connector is 6' from the leading edge (Y), the working distance (X) is 8' in each direction from the perpendicular, which translates to a 53° working angle.

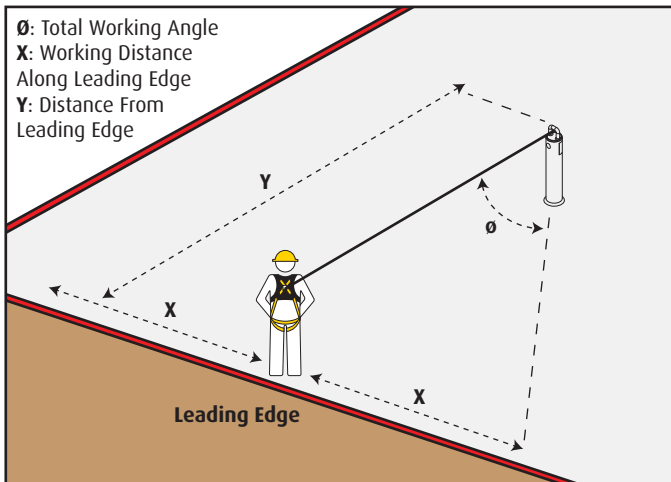



Components and Specifications

Made from aluminum, galvanized steel, stainless steel, zinc-coated steel, and high strength polycarbonate components.



Example Impact Indicator

- Green: Undeployed
- Red: Deployed

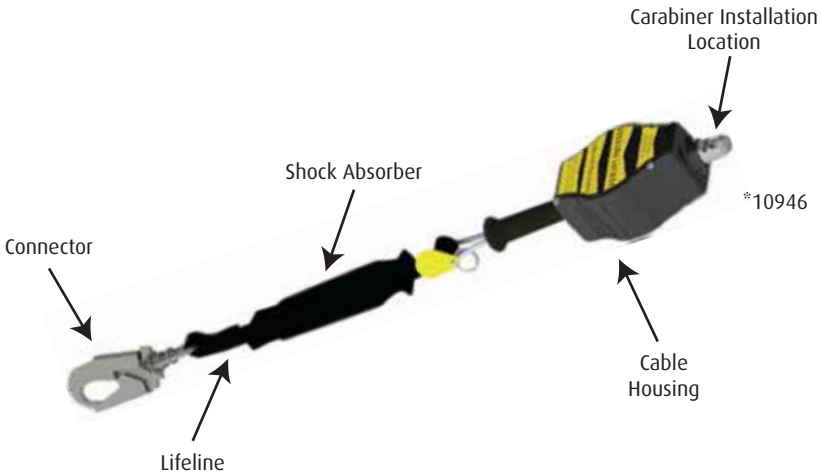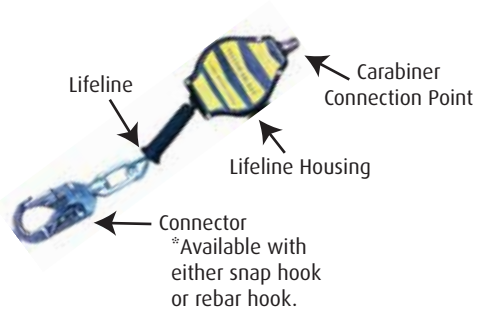

Part #	Length	Description
10946	10'	HD Yellow Jacket Cable SRL w/Shock Pack
10950	10'	Yellow Jacket Cable SRL w/High Strength Swivel Snap Hook
10952	10'	Yellow Jacket Cable SRL w/Aluminum Rebar Hook
10957	10'	Yellow Jacket Cable SRL w/High Strength Indicating Snap Hook
10958	10'	HD Yellow Jacket Cable SRL Double Leg Kit w/Shock Packs

Installation and Use

Guardian Fall Protection Yellow Jacket SRLs, MUST NEVER be used in Leading Edge (LE) applications, unless possessing an integral shock absorber, or used with a compatible shock absorber extension. Shock absorber end MUST be connected to harness.

No free fall is allowed without shock absorber.

MAXIMUM 2' free fall in LE applications.

ALWAYS avoid lifeline contact with sharp or abrasive edges and surfaces.

In Fall Arrest applications, anchorage connection point must always be at or above harness dorsal D-ring AND at or below anchorage connector.

For LE applications, MAXIMUM 2' below harness dorsal D-ring, or 2' above anchorage connector.

1. All components of the personal fall arrest system must be selected and deemed compatible with Yellow Jacket SRL by a Competent Person.
2. Ensure structure to which SRL is to be attached, and on which work is to be performed, is free of all hazards, including, but not limited to, debris, rot, rust, sharp or abrasive edges and surfaces, and hazardous materials.
3. Yellow Jacket SRLs may be used in either mobile or stationary applications.
4. For mobile applications, attach compatible carabiner to Yellow Jacket Carabiner Connection Point, then to harness D-ring compatible with the application. Attach snap hook or rebar hook to compatible anchorage connector. NEVER work so that SRL is positioned above anchorage point.
5. For stationary applications, attach compatible carabiner to Yellow Jacket Carabiner Connection Point, then to a compatible anchorage connector. Attach SRL snap hook to harness D-ring compatible with the application. NEVER work so that applicable harness D-ring is positioned above anchorage point unless using shock absorber extension.

***If using SRL with rebar hook configuration, SRL carabiner must ALWAYS be attached to harness dorsal D-ring, and rebar hook must ALWAYS be connected to compatible structural rebar.**

6. Ensure 100% tie-off will be maintained at all times, which may require the use of a back-up or supplementary fall protection system.

LE SRL Additional Use Instructions:

WARNING ALWAYS adhere to the following warnings and specifications when using LE SRLs.

When used in combination with a compatible shock absorber extension, Yellow Jacket SRLs are tested and certified for horizontal use over a steel edge without burrs. Yellow Jacket SRLs may be used over similar surfaces, such as metal sheeting or other steel formations.

The allowable angle of redirection of the lifeline portion of Yellow Jacket SRLs at the leading edge of a fall hazard **MUST** be at least 90° (see Image 1).

Anchor point **MUST** be situated no lower than the leading edge of applicable fall hazard(s).

Prior to use, a Competent Person **MUST** calculate adequate fall clearance (see pg. 7).

ALWAYS attach to anchorage connector that will allow for required setback distance (see Image 2).

Setback distance: As determined by product testing, Guardian Fall Protection Yellow Jacket SRLs MUST be installed a MINIMUM 6' (1.8m) from the leading edge of applicable fall hazard(s).

Yellow Jacket SRLs may be used in combination with horizontal lifelines. All installation, set-up, and use of horizontal lifelines must be done under the supervision of a Qualified Person.

NEVER work on the far side of an opening that is opposite the Yellow Jacket SRL anchorage point.

In the event of a fall over the edge, special rescue measures may be necessary. Always account for use of Yellow Jacket SRLs in job site rescue plan developed by job site Competent Person.




Image 1






Image 2

Labels

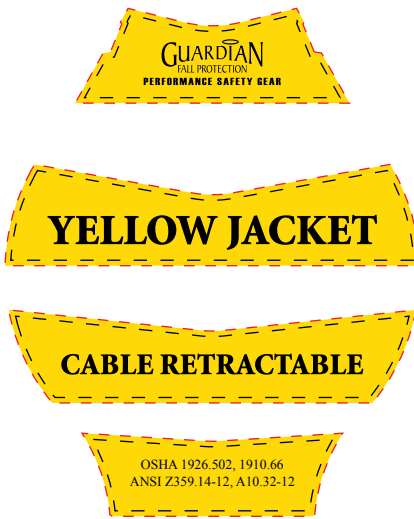

Front

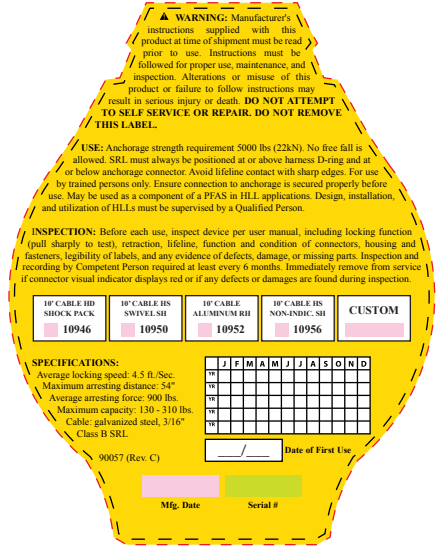

Back



Inspection Log

User must inspect prior to EACH use. Competent Person other than user must complete formal inspection at least every 6 months. Competent Person to inspect and initial.

Date of First Use: _____. Product lifetime is indefinite as long as it passes pre-use and Competent Person inspections.

This inspection log must be specific to one Yellow Jacket SRL. Separate inspection logs must be used for each Yellow Jacket SRL. All inspection records must be made visible and available to all users at all times.

	J	F	M	A	M	J	J	A	S	O	N	D
YR												
YR												
YR												
YR												
YR												

If equipment fails inspection IMMEDIATELY REMOVE FROM SERVICE.

Notes
